



FC-3 TAP UNIT

SYSTEM DIMENSIONS*	FILLING & REFRIGERATION SYSTEM
HEIGHT	22 ½ in 572 mm
WIDTH	16 ½ in 419 mm
DEPTH	20 5/16 in 516 mm
WITH DRIP TRAY	26 ½ in 673 mm
DRY WEIGHT	65 lbs.

**Requires 2 additional inches of clearance on all sides including top for proper ventilation and maintenance access.*

Legs are adjustable between ¾" - 1 ½"

CONFIGURATION OF SYSTEM: ALL-IN-ONE COUNTERTOP FILTRATION CHILLING, CARBONATION & DISPENSING SYSTEM





CHILLING CAPACITY	70-100 Liters in an Hour
MAXIMUM FLOW CAPACITY	240 Liters Per Hour
POWER VOLTAGE FREQUENCY RUNNING AMPS	120V 60 Hz 6 Amps
CO ₂ SPECIFICATION	External Primary Tank or Bulk CO ₂ supply connection. CO ₂ line includes a ¼" flare with Barb Stem Fitting. Operating Pressure is at 80 PSI.
WATER SUPPLY PRESSURE	3/8 " or 1/4" Braided Bev-Flex Tubing 40 psi min - 60 psi max (2.75 - 4.1 bar) Pre-regulated with proper backflow

STANDARD FEATURES:

- 💧 STILL, SPARKLING & AMBIENT
- 💧 COLD CARBONATION
- 💧 PRESSURE REGULATOR
- 💧 MANUAL PORTION CONTROL
- 💧 RAPID CHILLING



FC-3 TAP UNIT

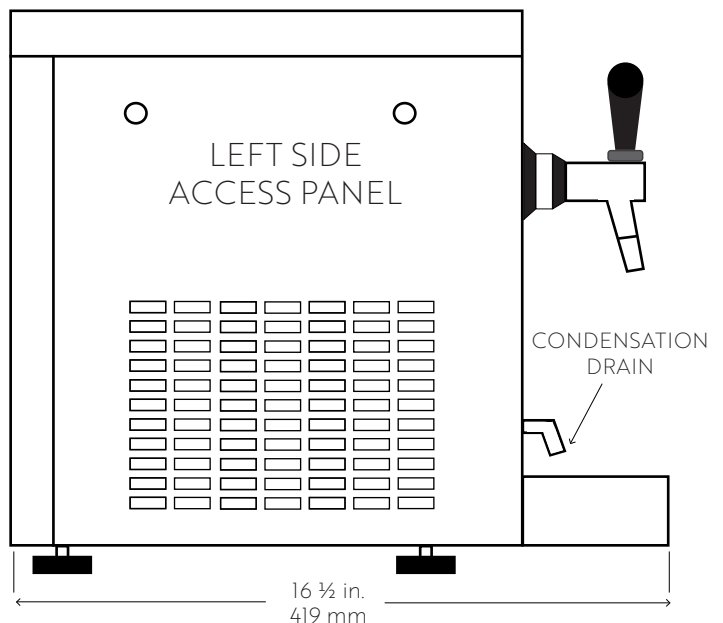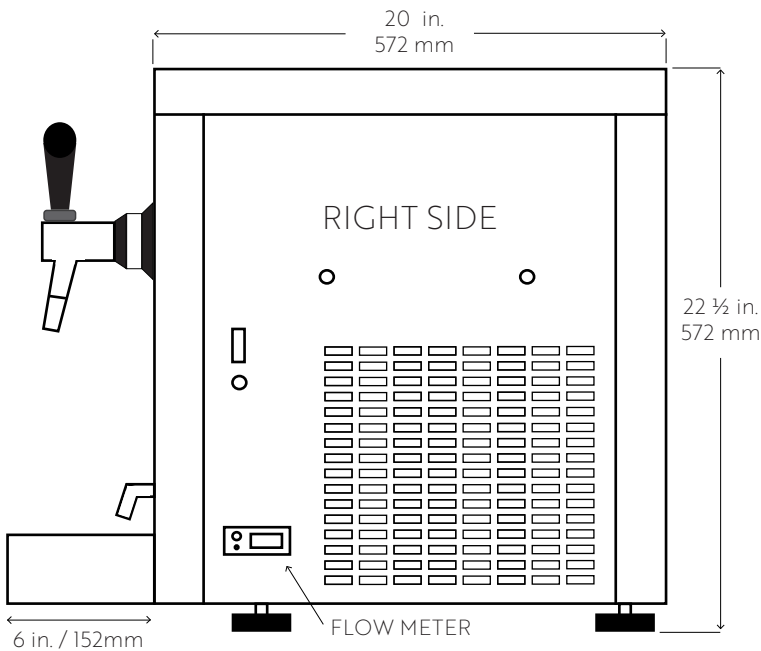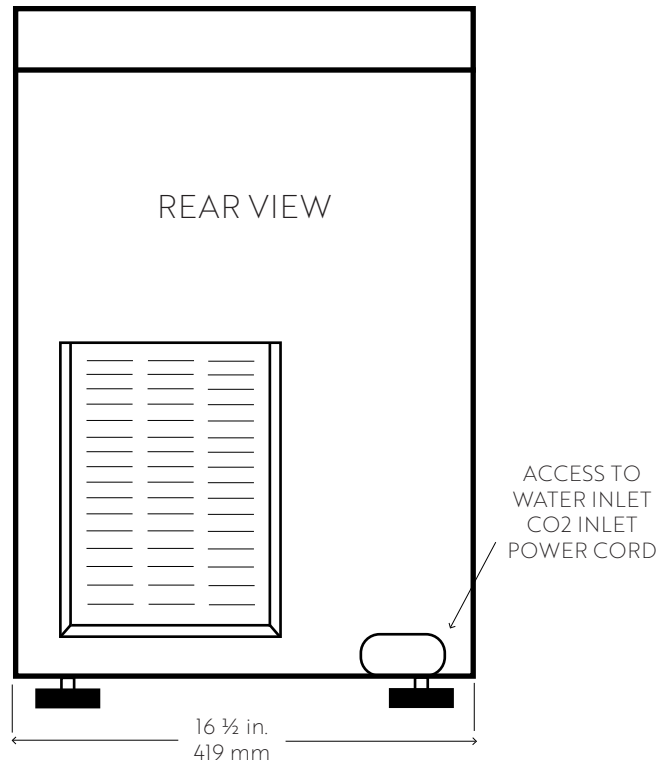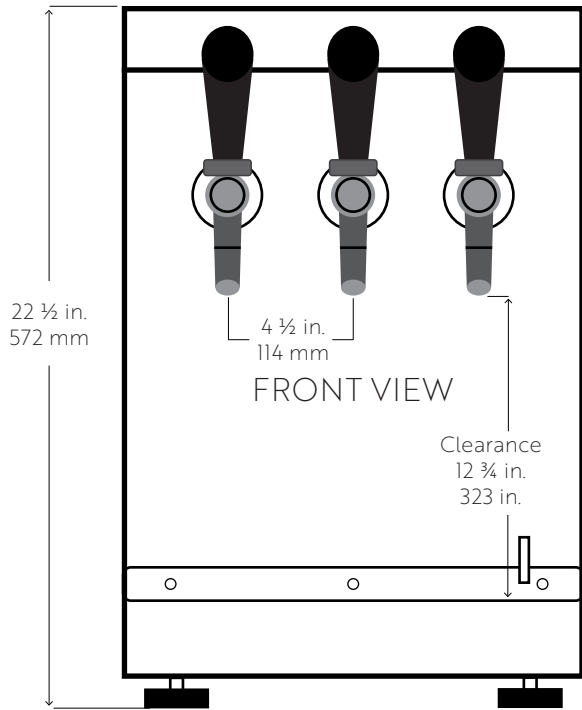

CHILLED  SPARKLING  AMBIENT



FC-2 TAP UNIT

SYSTEM DIMENSIONS*	FILLING & REFRIGERATION SYSTEMS
HEIGHT	19 ³ / ₈ in 492 ¹ / ₈ mm
WIDTH	11 ³ / ₄ in 298 mm
DEPTH w/ DRIP TRAY	18 ⁵ / ₈ in 473 mm 23 ⁵ / ₈ in 600 mm
WEIGHT	65 lbs. 29.5 kg

**Requires 2 inches of open breathing room on all sides and proper ventilation if built into a cabinet. Legs are adjustable 3/4" - 1 1/2"*

TWO (2) SEPARATE COMPONENTS CONSISTING OF:
ONE (1) COUNTERTOP CHILLING DISPENSER WITH CARBONATION
ONE (1) EXTERNAL FILTRATION PACKAGE

ICE BANK	6 lbs. 2.72 kg
CHILLING CAPACITY	40 Liters in an hour (varies with ambient water temperature)
MAXIMUM FLOW CAPACITY	240 Liters per hour
DRAW RATE	120V/60 Hz/5.2 Running Amps
CO ₂ SPECIFICATION	External Primary Tank or Bulk CO ₂ supply connection. CO ₂ line includes a 1/4" flare with barb stem fitting. Operating pressure is 80 psi.
WATER SUPPLY/PRESSURE PSI (BAR)	3/8" of 1/4" Poly Tubing for water connection. 55 psi min - 60 psi max (2.75 - 4.1 bar). Pre-regulated with proper backflow prevention.





STANDARD FEATURES:

- 💧 STILL AND SPARKLING
- 💧 COLD CARBONATION

- 💧 MANUAL PORTION CONTROL
- 💧 RAPID CHILLING



FC-2 TAP UNIT

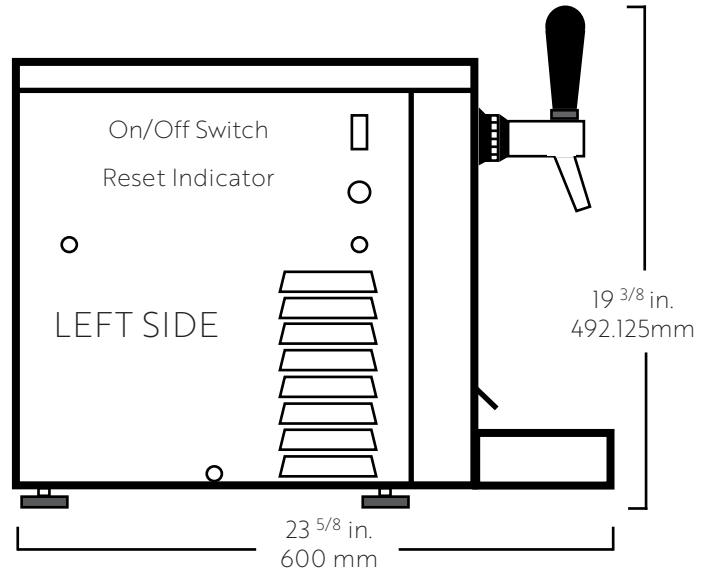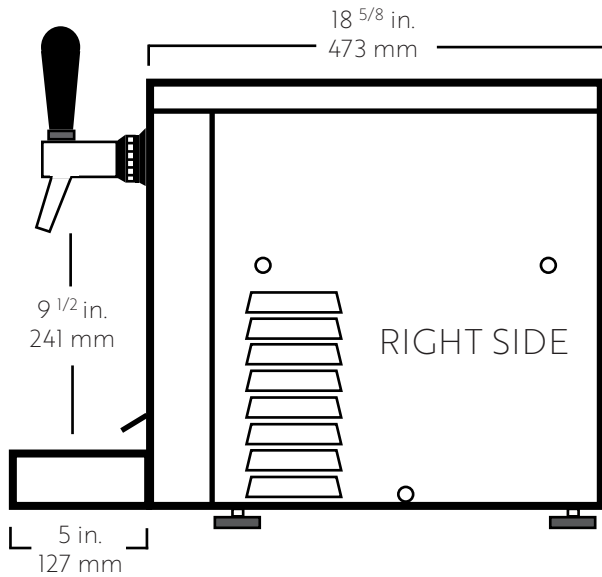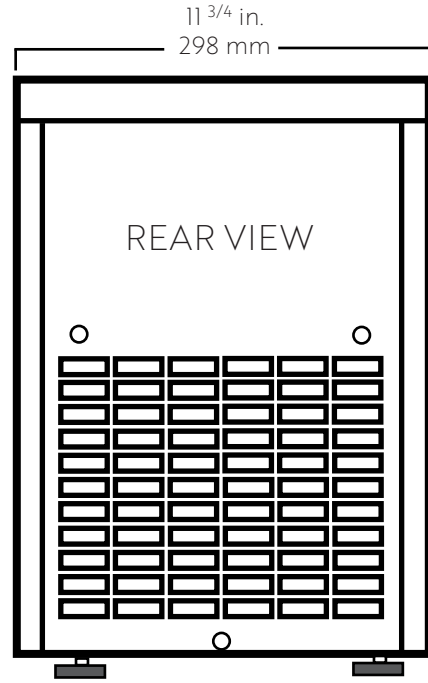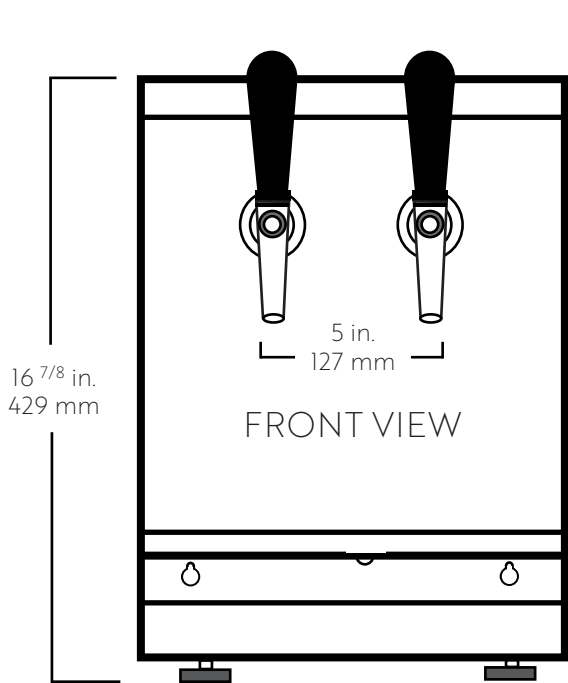

CHILLED SPARKLING  CHILLED STILL



FC TOWER - 2 Tap



SPECIFICATIONS

- Faucet flow rate: 1.5-2oz per second
- Flow rate is adjustable and can be locked in a specific setting.
- Tower Height: 20.25"
- Bottle Filling Clearance: 11"
- Weight: 14lbs
- Ideal for self-service; self-closing faucets with downward pointing nozzles.
- Supplied with quick connect fittings for easy hook-up to our CR-4L38 trunkline.
- Comes with base gasket for water tight seal to countertop.

SELF-SERVICE SPARKLING & CHILLED STILL WATER, TWO FAUCET TOWER OPTIONS

CBR-V2C-SSX Chrome Finish
 CBR-V2BLC-SSX Black Chrome Finish
 CBR-V2GLD-SSX Gold Finish




CHILLING CAPACITY	50 Liters per hour
MAXIMUM FLOW CAPACITY	240 Liters per hour
POWER VOLTAGE FREQUENCY RUNNING AMPS	120V 60Hz 6 Amps
CO ₂ SPECIFICATION	External Primary Tank or Bulk CO ₂ supply connection. CO ₂ line includes a 1/4" flare with barb stem fitting. Operating pressure is 80 psi.
WATER SUPPLY/PRESSURE PSI (BAR)	3/8" of 1/4" Poly Tubing for water connection. 55 psi min - 60 psi max (2.75 - 4.1 bar). Pre-regulated with proper backflow prevention.

STANDARD FEATURES:

- STILL & SPARKLING
- COLD CARBONATION
- MANUAL PORTION CONTROL
- RAPID CHILLING



FC-2 TOWER - 2 Tap

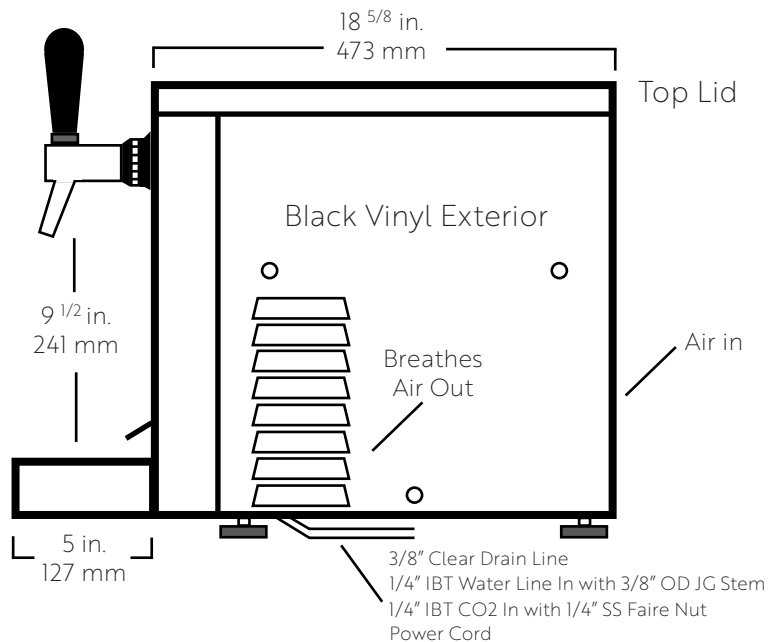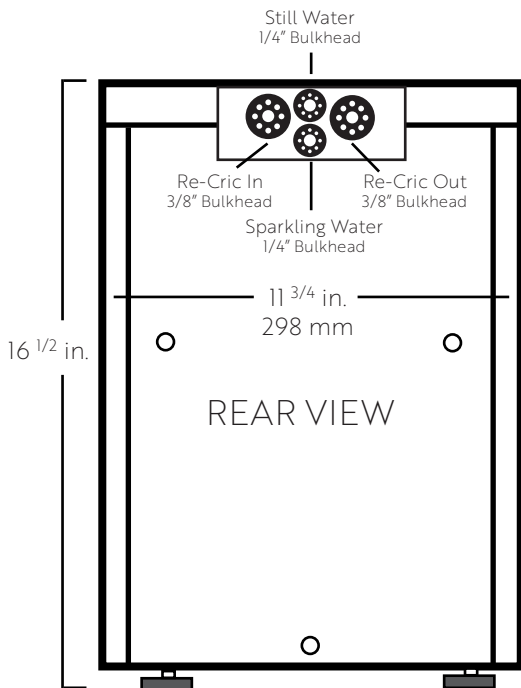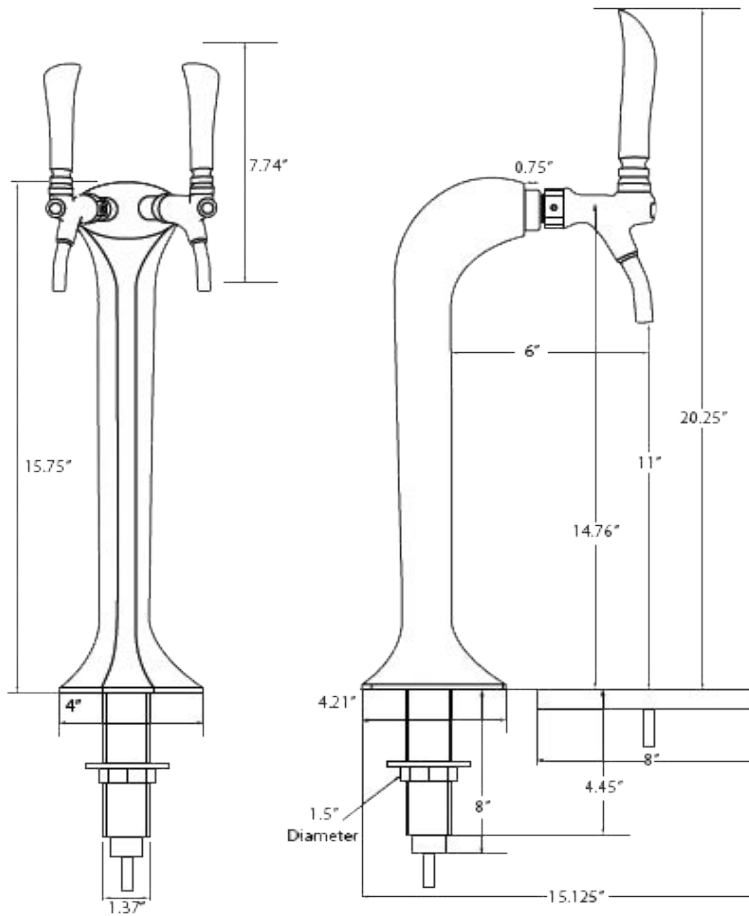

Draw Rate	1 - 12oz/min	Ice Bank	6 lb.
Compressor	1/9 hp	Electrical	120 Volt 60 Hz
Water Bath	2.5 Gallons	Shipping Weight	80 lb.
Carbonator	1.5 - GPM	Dry Weight	65 lb.